
Operation Manual

Diva-Lite 20/30 LED



Diva-Lite LED DMX System



DIV-L20X-120U

Diva-Lite 20 LED DMX, Univ 120U

DIV-L20X-230U

Diva-Lite 20 LED DMX, Univ 230U




DIV-L30X-120U

Diva-Lite 30 LED DMX, Univ 120U

DIV-L30X-230U

Diva-Lite 30 LED DMX, Univ 230U

Included w/ Diva-Lite LED Models



LVR-SL290-P

Diva-Lite 20 Louver/HP, 90° (Included)

LVR-SL390-P

Diva-Lite 30 Louver/HP, 90° (Included)



MTP-LBC

Kino 41 Lollipop w/ Baby Receiver Curve (16mm)
(Included)

Diva-Lite 20 LED DMX Kits



**Diva-Lite 20 LED
DMX Kit w/ Soft Case**

KIT-DL20XB-120U

Diva-Lite 20 LED DMX Kit, Univ 120U w/ Soft Case

KIT-DL20XB-230U

Diva-Lite 20 LED DMX Kit, Univ 230U w/ Soft Case

Kit Contents:

1 Diva-Lite 20 LED Fixture
1 Soft Case

Dimensions:

31 x 7.5 x 18"
(79 x 19 x 46cm)

Weight:

19.5 lb
(9kg)



**Diva-Lite 20 LED
DMX Kit**

KIT-DL20X-120U

Diva-Lite 20 LED DMX Kit, Univ 120U w/ Travel Case

KIT-DL20X-230U

Diva-Lite 20 LED DMX Kit, Univ 230U w/ Travel Case

Kit Contents:

1 Diva-Lite 20 LED Fixture
1 Travel Case

Dimensions:

28.5 x 8.5 x 19.5"
(72 x 22 x 49.5cm)

Weight:

26 lb
(12kg)



**Diva-Lite 20 LED
DMX Kit (2-Unit)
w/ Flight Case**

KIT-DL22X-120U

Diva-Lite 20 LED DMX Kit, Univ 120U (2-Unit)
w/ Flight Case

KIT-DL22X-230U

Diva-Lite 20 LED DMX Kit, Univ 230U (2-Unit)
w/ Flight Case

Kit Contents:

2 Diva-Lite 20 LED Fixture
1 Flight Case

Dimensions:

22.5 x 16 x 33.5"
(57 x 41 x 85cm)

Weight:

58 lb
(26kg)

Diva-Lite 30 LED DMX Kits



**Diva-Lite 30 LED
DMX Kit w/ Soft Case**

KIT-DL30XB-120U

Diva-Lite 30 LED DMX Kit, Univ 120U w/ Soft Case

KIT-DL30XB-230U

Diva-Lite 30 LED DMX Kit, Univ 230U w/ Soft Case

Kit Contents:

1 Diva-Lite 30 LED Fixture
1 Soft Case

Dimensions:

42.5 x 7.5 x 16.5"
(108 x 19 x 42cm)

Weight:

23 lb
(10kg)



**Diva-Lite 30 LED
DMX Kit w/ Flight Case**

KIT-DL30X-120U

Diva-Lite 30 LED DMX Kit, Univ 120U w/ Flight Case

KIT-DL30X-230U

Diva-Lite 30 LED DMX Kit, Univ 230U w/ Flight Case

Kit Contents:

1 Diva-Lite 30 LED Fixture
1 Flight Case

Dimensions:

46 x 11 x 16.5"
(117 x 28 x 42cm)

Weight:

43 lb
(19.5kg)

Mounting Procedures



Mounted on a baby stand.



Mounted to pipe grid.



Note: When hanging in a studio, loop a safety cord through the metal ring provided on the back of the fixture.



Turn the knob to loosen or tighten the mount.



Lollipops are interchangeable.

- MTP-L** Kino 41 Lollipop w/ 3/8" Pin (10mm)
- MTP-LBC** Kino 41 Lollipop w/ Baby Rcvr Curve (16mm)
- MTP-LBS** Kino 41 Lollipop w/ Baby Rcvr Short (16mm)

Baby Offset Arm




MTP-B41F
Kino Offset w/
Baby Receiver (16mm)



The Baby Offset Arm (**MTP-B41F**) allows fixtures to mount on the center of a stand or it can also be under slung from a baby stand to use as an up light.

Applying Louver

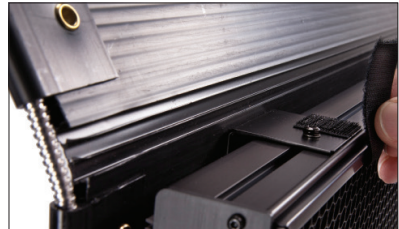

The Louver is fastened to the fixture with 4 Velcro straps.

SnapBag & SnapGrid



The SnapBag accessory (**DFS-FS31-S** & **DFS-FS21-S**) is a lightweight fabric tailor-made for the Diva-Lite LED. It slips over the fixture and is attached with straps. The reflective material intensifies the soft light. The removable Magic cloth or Grid cloth attaches to the inside with Velcro.



The SnapGrid accessory (**LVR-FS340-S** & **LVR-FS240-S**) is constructed of pre-stretched fireproof fabric with a built-in stainless steel frame. It unfolds and snaps into place. This model requires the use with the corresponding SnapBag; it is not designed to be used by itself.

Mounting Flozier



To mount Flozier accessory, remove Louver.



Stretch two elastic cords around fixture.



Take up slack on both elastic cords.



Expand the Barndoors to smooth out the face of the Flozier and eliminate wrinkles.

Fixture Power



AC Input

The Diva-Lite LED is powered AC and includes an IEC connection. A locking power cord is included with the fixture. To remove the plug, move the red tab to release. The fixture has a built-in power supply with universal input from 100-240VAC.



DC Input

The Diva-Lite LED can also be operated on 24VDC (input range 18-36VDC) through a 3-Pin XLR. A low voltage warning will display "LPWR" when the battery is running low.

The pin polarity is:
Pin #1 – Ground
Pin #2 + 18-36VDC
Pin #3 not used

Ambient Operating Temperature

The Diva-Lite LED is designed to operate at temperatures from 14°F to 104°F (-10°C to 40°C).

Control Panel - White Mode



A) On /Off: On = Green light displayed. Off = Red light displayed. The display and all menu settings can be operated while the power button is in the **Off** position, as long as power is applied to the fixture. The On /Off button only controls the light source.

B) **Menu**: Provides access to menu options such as General settings, Reset, DMX and DMX Wireless settings. *Tip*: While on control screen, press and hold for 3 seconds to switch through menus (**White, Gels & Hue, RGB**).

C) **Kelvin & G/M (Green/Magenta) Preset Buttons**: Factory defaults left to right are: 2700K, 3200K, 5000K and 6500K. G/M default value is 000. User can also use these preset buttons to store custom Kelvin and G/M settings.

D) **Display**: Provides access to Dim, Kelvin, G/M, and DMX channel. Factory reset will show: Dim = 10%, Kelvin = 2700K, G/M = 000, DMX = 001.

E) **Lock**: Press the **Lock** button to disable all buttons and control knob. Press for 3 seconds to restore presets to default factory settings.

F) **Mode**: Press to navigate from Dim to Kelvin and G/M settings. When in sub-menus, pressing Mode always returns you to main display. When DMX is applied, use Mode to access DMX channel on main display. *Tip*: Long press will bring you back one step.

G) **Data Port**: Mini B USB for software updates.

H) **Dimmer Knob**: Manually adjusts Dim, Kelvin, G/M levels and DMX address. Press the knob to toggle between fine and coarse adjustments or when selecting options within menus.

DMX Note: Each Diva-Lite LED has an “**AUTO TERMINATE**” feature. The last fixture that does not have an XLR cable attached to the DMX “Out” port will automatically terminate.

Control Panel - Color & RGB Mode



A B C D



A B C D

Color Mode

- A) Menu:** Provides access to menu options such as General settings (**Color Mode**), Reset, DMX and DMX Wireless settings. *Tip:* While on control screen, press and hold for 3 seconds to switch through menus (**White, Gels & Hue, RGB**).
- B) Kelvin, G/M (Green/Magenta) Gel, Hue & Saturation Preset Buttons:** Factory defaults left to right are: 2700K, 3200K, 5000K and 6500K. G/M default value is 000. User can also use these preset buttons to store custom Kelvin between 2500K and 9900K and custom G/M, Gel, Hue and Saturation settings.
- C) Display:** Provides access to Dim, Kelvin, G/M, Gel, Hue/Saturation and DMX channel. Factory reset will show: Dim = 10%, Kelvin = 2700K, G/M = 000, DMX = 001.
- D) Mode:** Press to navigate from Dim to Kelvin, G/M, Gel, Hue and Saturation settings. When in sub-menus, pressing Mode always returns you to main display. When DMX is applied, use Mode to access DMX channel on main display. *Tip:* Long press will bring you back one step.

RGB Mode

- A) Menu:** Provides access to menu options such as General settings (**RGB Mode**), Reset, DMX and DMX Wireless settings. *Tip:* While on control screen, press and hold for 3 seconds to switch through menus (**White, Gels & Hue, RGB**).
- B) Kelvin, G/M (Green/Magenta) RGB (Red, Green, Blue) Preset Buttons:** Factory defaults left to right are: 2700K, 3200K, 5000K and 6500K. G/M default value is 000. User can also use these preset buttons to store custom Kelvin between 2500K and 9900K and custom G/M, and RGB settings.
- C) Display:** Provides access to Dim, Kelvin, G/M, RGB and DMX channel. Factory reset will show: Dim = 10%, Kelvin = 2700K, G/M = 000, DMX = 001.
- D) Mode:** Press to navigate from Dim to Kelvin, G/M, RGB settings. When in sub-menus, pressing Mode always returns you to main display. When DMX is applied, use Mode to access DMX channel on main display. *Tip:* Long press will bring you back one step.

Accessories



DFS-SL30-H Diva-Lite 30 Flozier, Half

DFS-SL20-H Diva-Lite 20 Flozier, Half



DFS-FS31-S Diva-Lite 30 SnapBag
w/ 2 x Diffusion

DFS-FS21-S Diva-Lite 20 SnapBag
w/ 2 x Diffusion



LVR-FS340-S Diva-Lite 30 SnapGrid 40°

LVR-FS240-S Diva-Lite 20 SnapGrid 40°



LVR-SL390-P Diva-Lite 30 Louver/HP 90°

LVR-SL360-P Diva-Lite 30 Louver/HP 60°

LVR-SL290-P Diva-Lite 20 Louver/HP 90°

LVR-SL260-P Diva-Lite 20 Louver/HP 60°



Lollipops are interchangeable.

MTP-L Kino 41 Lollipop w/ 3/8" Pin (10mm)

MTP-LBC Kino 41 Lollipop w/ Baby Rcvr Curve
(16mm)

MTP-LBS Kino 41 Lollipop w/ Baby Rcvr Short
(16mm)

Cases



BAG-SL30 Diva-Lite 30 Soft Case

BAG-SL20 Diva-Lite 20 Soft Case



KAS-DL30 Diva-Lite 30 Flight Case

KAS-DL20-C Diva-Lite 20 Travel Case



KAS-DL22 Diva-Lite LED 20 Flight Case (2)

Diva-Lite LED Fixture Specifications



**Diva-Lite 20 LED
DMX**

DIV-L20X Diva-Lite 20 LED DMX

AC Input Voltage: 100~240VAC 50/60Hz, 150W

Amperage VAC: 1.25A at 120VAC, 0.65A at 230VAC

DC Input Voltage: 18~36VDC, 150W

Amperage VDC: 6.25A at 24VDC

Kelvin Range: 2700K~6500K (White Mode)

Kelvin Range: 2500K~9900K (Color Mode)

Dimming Range: 100%~1%

Weight: 14.5 lb (6.5kg)

Dimensions: 25 x 13 x 6"

(63.5 x 33 x 15cm)



**Diva-Lite 30 LED
DMX**

DIV-L30X Diva-Lite 30 LED DMX

AC Input Voltage: 100~240VAC 50/60Hz, 150W

Amperage VAC: 1.25A at 120VAC, 0.65A at 230VAC

DC Input Voltage: 18~36VDC, 150W

Amperage VDC: 6.25A at 24VDC

Kelvin Range: 2700K~6500K (White Mode)

Kelvin Range: 2500K~9900K (Color Mode)

Dimming Range: 100%~1%

Weight: 17 lb (8kg)

Dimensions: 39 x 10.5 x 6"

(99 x 27 x 15cm)

FCC Part 15 Verification:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

FCC Part 15 Declaration of Conformity:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



KINO FLO, INC
Diva-Lite 20 LED, Diva-Lite 30 LED
ID: XRSCRMXTIMO101
IC: 8879A-CRMXT101

For latest Warranty information and Certifications,
see Kino Flo website at www.kinoflo.com.

Environmental: Disposal of Old Electrical & Electronic Equipment.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. This product is made of recyclable materials and should be disposed of in accordance with governmental regulations.

Kino Flo, Inc. 2840 N. Hollywood Way, Burbank, CA 91505, USA
Tel: 818 767-6528 website: www.kinoflo.com